Top View

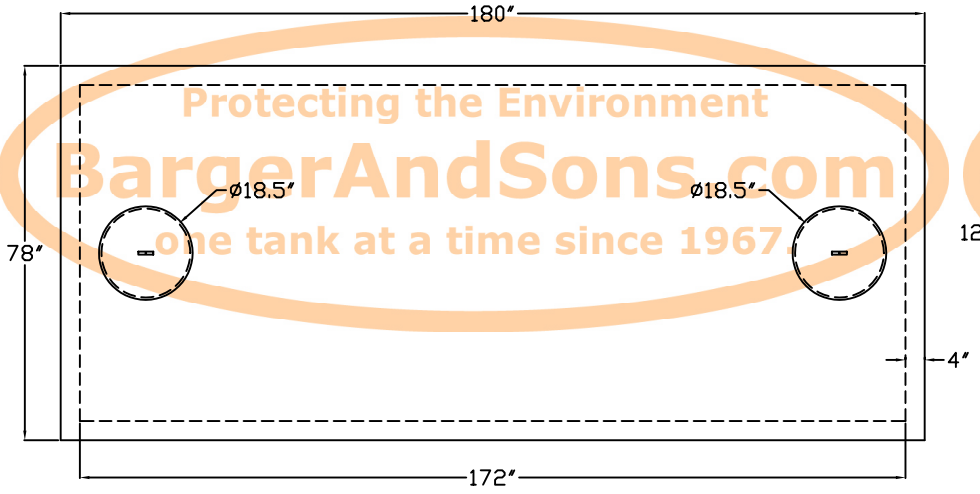

End View

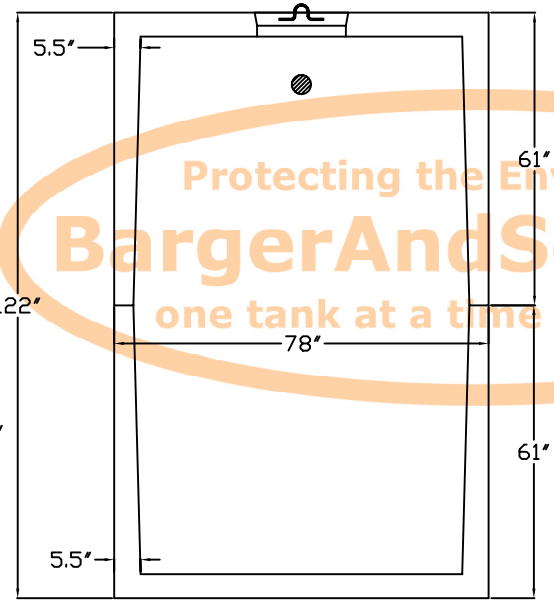

Side View

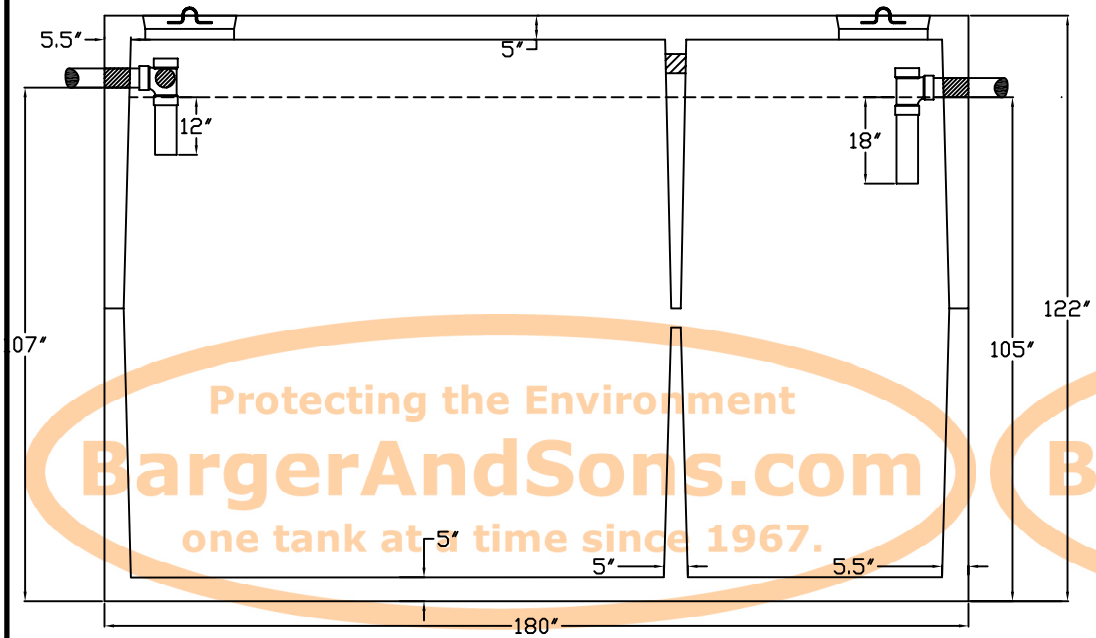

Baffle View

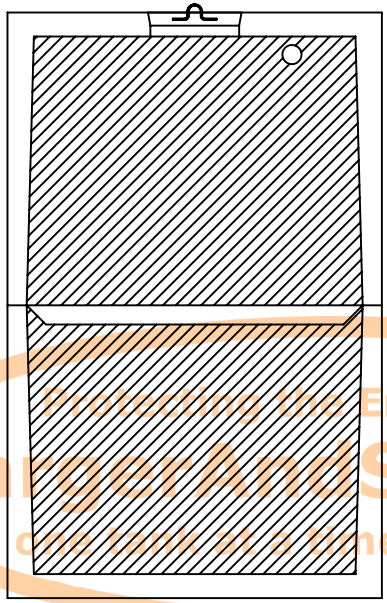

Specifications

Concrete: 5,000 psi minimum strength (28 day)

Reinforcing: Primary reinforcement will be #3 and #4 rebar (Grade 60) on 18" centers.

Risers: Risers over each access port will be 24" diameter and brought to finished grade.

Sealant: Sealant used in the seam of the tank is a controlled expansion hydrophillic waterstop.

Pipe Penetrations: Inlet and outlets are fitted with seals that meet or exceed all ASTM C923 specifications.

Baffle Wall: The baffle wall is poured monolithically with the tank walls and bottom for each half respectively.

Tank Label: On the end of the tank, above and to the right of the outlet, the tank label will read "CRB 5000".

Protecting the Environment
BargerAndSons.com
one tank at a time since 1967.

Manufactured by:
C.R. Barger & Sons, Inc.
238 Mays Valley Road
Harriman Tn 37748
Phone 865.882.5860 **Fax** 865.882.6394
www.bargerandsons.com

General Notes:
All vertical measurements are accurate within ± 1 inch on the tank. The lids can be moved and resized if necessary. Written specifications are available upon request.

Tank Type:	Septic Tank 5000 Gallon Mid-Seam		
Date:	12.032204	Approx. Weight:	40,000 lbs.
Drawn By:	Eric Barger	State:	Ohio