




Top View

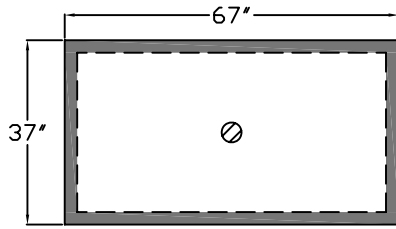

End View



Side View

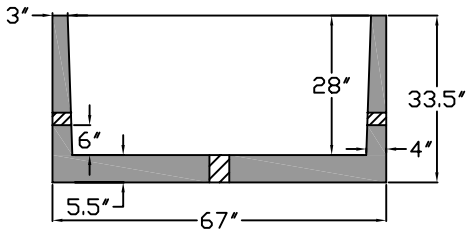

Approved for Production

Project: _____

Date: _____

Quantity: _____

By: _____



Specifications

- Concrete:** 5,000 psi minimum strength (28 day)
- Reinforcing:** Primary reinforcement will be a #3 rebar (Grade 60) rebar.
- Drain:** A drain and drain cover are fitted in the vault floor.



C.R. Barger & Sons, Inc.
 P.O. Box 370 - Kingston TN 37763
 Phone 888.882.5860 - BargerAndSons.com

2" Mallory Valley Meter Box

Mallory Valley Utility District

Date: 10.222009

Drawn By: Eric Barger

Approx. Weight: 18,000 lbs.