



Front View

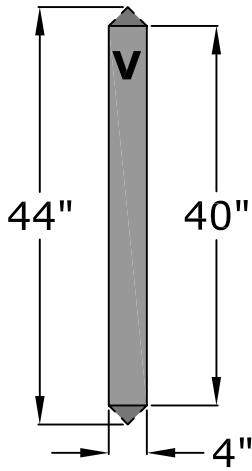

Side View

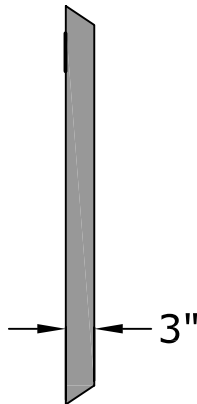

**Approved for Production**

Project: \_\_\_\_\_

Date: \_\_\_\_\_

Quantity: \_\_\_\_\_

By: \_\_\_\_\_



**C.R. Barger & Sons, Inc.**  
P.O. Box 370 - Kingston TN 37763  
Phone 888.882.5860 - BargerAndSons.com

**Specifications**

**Concrete:** 4,500 psi minimum strength (28 day)  
**Reinforcement:** #3 rebar, Grade 60  
**Heights:** Custom heights available.

**Concrete Valve Marker**

Date: 1.252010

Drawn By: Eric Barger