



Top View

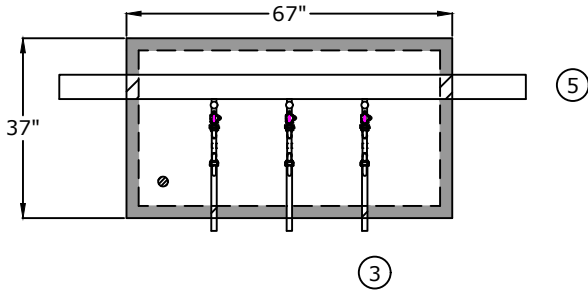


1. Meter Yoke
A.Y. McDonald
770-2--WDMD 33
2. Corporation Stop
A.Y. McDonald
3/4" CC x FNPT 74101BCAPF
3. 3/4" x 24" Brass nipple
4. 29" x 59" opening single leaf aluminum door, pedestrian rated (300 lb/ft²) S1R029059CD
5. 4" Class 56 D.I.P.
6. 2" drain hole


Side View

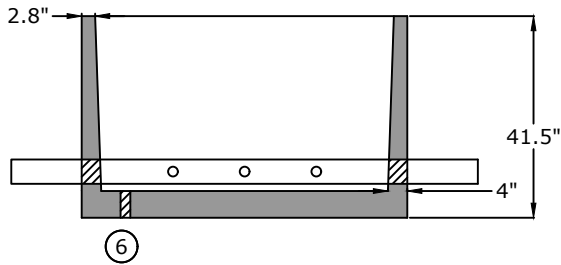


Component Detail

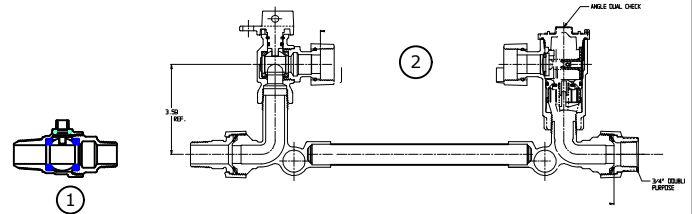

End View



Pipe detail for taps

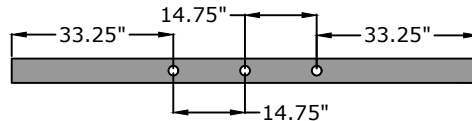

Approved for Production

Project: _____ Date: _____

Quantity: _____ By: _____

BARGER PRECAST

Specifications

Concrete: 5,000 psi minimum strength (28 day)
Pipe Penetrations: All pipe penetrations are placed according to job requirements.
Pipe Stands: N/A
Sealant: N/A
Steps: N/A

3/4" - 3 Gang Meter Vault 41.5" Tall City of Franklin

C.R. Barger & Sons, Inc.
P.O. Box 370 - Kingston TN 37763
Phone 888.882.5860 - BargerAndSons.com

Date: 3.082018

Drawn By: Eric Barger

Approx. Vault Weight: 3,100 lb