Top View

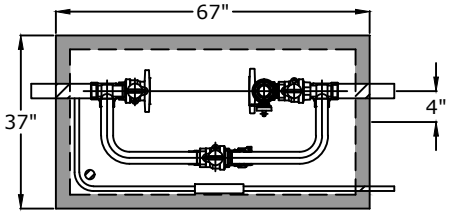

Notes

1. (2) 2" x 24" brass nipple
2. (1) 2" x 1" A.Y. McDonald no-rise no lead setter 720R700KWFF777 x 22.88 x 451
3. (3) 2" Oval meter gasket 2-bolt
4. (3) $\frac{5}{8}$" Hex bolt and nut (2 each)
5. (1) A.Y. McDonald MIPxPJC adapter 74753-22 no lead
6. (1) A.Y. McDonald 1" copper tube L 12"x16"
7. (1) A.Y. McDonald ball valve PJCxFIPT 76102W-22 no lead
8. (1) 1" A.Y. McDonald line setter 770-4-WDMD 44
9. 1" x 24" brass nipple
10. 29" x 59" opening single leaf aluminum door, pedestrian rated (300 lb/ft^2) S1R029059CD
11. 2" drain hole
12. City of Lebanon to supply 2" strainer and compound meter and 1" meter

Side View

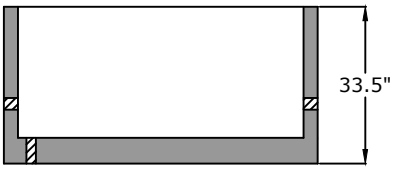

End View



Approved for Production

Project: _____ **Date:** _____

Quantity: _____ **By:** _____

BARGER PRECAST

Specifications

Concrete: 5,000 psi minimum strength (28 day)
Pipe Penetrations: All pipe penetrations are placed according to job requirements.

C.R. Barger & Sons, Inc.
P.O. Box 370 - Kingston TN 37763
Phone 865.270.8080 - BargerAndSons.com

2" Meter with Bypass - 1" Irrigation
Cit of Lebanon, TN

Date:	Drawn By:	Approx. Vault Weight:
6.222023	Eric Barger	3,050 lbs.