

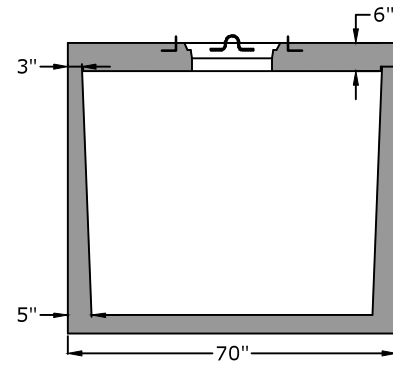
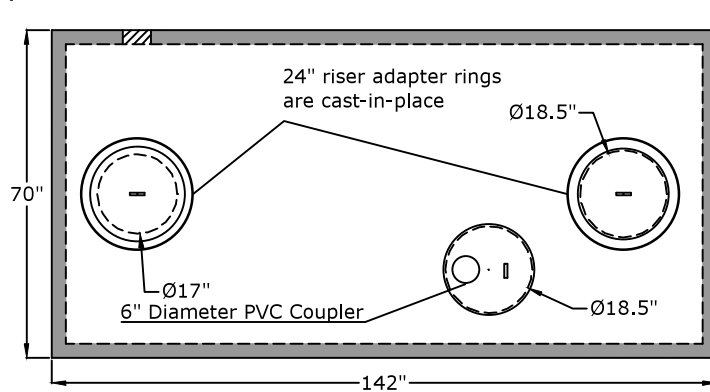


## Top View

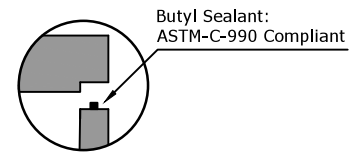

## Side View

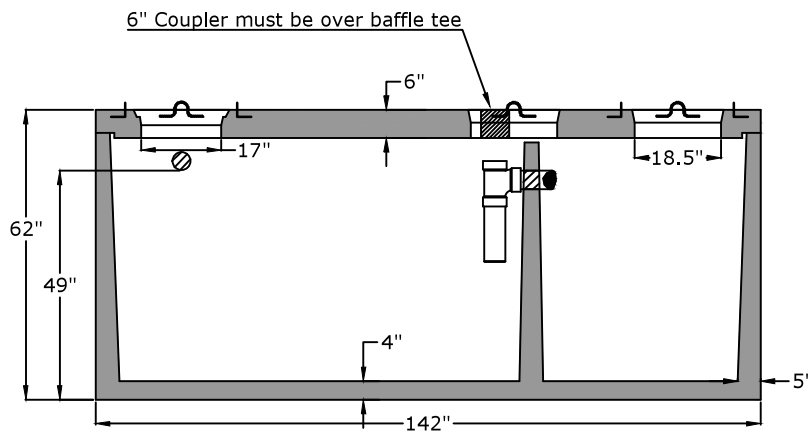

## Approved for Production

Project: \_\_\_\_\_

Date: \_\_\_\_\_

Quantity: \_\_\_\_\_

By: \_\_\_\_\_

## Specifications

**Concrete:** 5,000 psi minimum strength (28 day)

**Reinforcing:** Primary reinforcement will be rebar.

**Riser Adapter Ring:** Cast in place.

**Sealant:** Sealant used in the seam of the tank will meet or exceed ASTM C990.

**Pipe Penetrations:** Inlet and outlets are fitted with seals that meet or exceed all ASTM C923 specifications.

**Partition Wall:** The partition wall, if present, is poured monolithically.

**Watertight:** ASTM C 1227 latest revision. Tank must be tested within 3 working days of delivery.

**Drawing:** All measurements are accurate within  $\pm 1$  inch.

**Warranty:** See Terms and Conditions.

Five generations. One goal.  
**BargerAndSons.com**  
Quality precast concrete.

**C.R. Barger & Sons, Inc.**  
P.O. Box 370 - Kingston TN 37763  
Phone 888.882.5860 - BargerAndSons.com

## Roane County Public Utility 1500 Pump Tank Left Hand Inlet Configuration

Date: 3.252013

Drawn By: EB

Approx. Vault Weight: 17,000 lbs.