



Outside

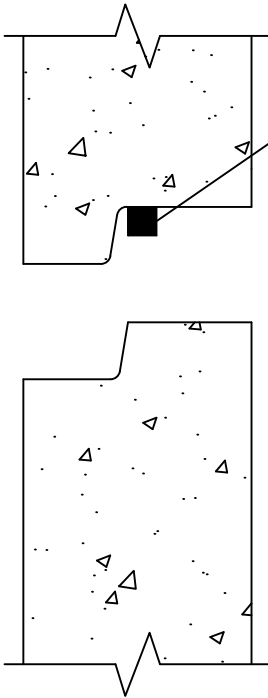

Butyl sealant

Outside

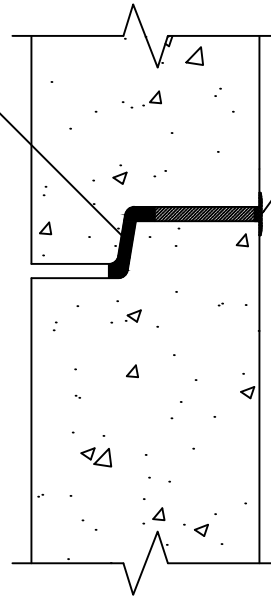

Cement grout
(By project,
not required)

Approved for Production

Project: _____

Date: _____

Quantity: _____

By: _____

BARGER PRECAST

Specifications

Concrete: 5,000 psi minimum strength (28 day)

Joint: Butyl sealant will be ASTM C 990.

Inside joint: Cement grout (If required by project specs).

General: Box culvert manufactured to meet or exceed the latest revision of ASTM C1433.

Precast Concrete Box Culvert Joint Detail

C.R. Barger & Sons, Inc.
P.O. Box 370 - Kingston TN 37763
Phone 888.882.5860 - BargerAndSons.com

Date: 12.172018

Drawn By: Eric Barger

Approx. Vault Weight: N/A