

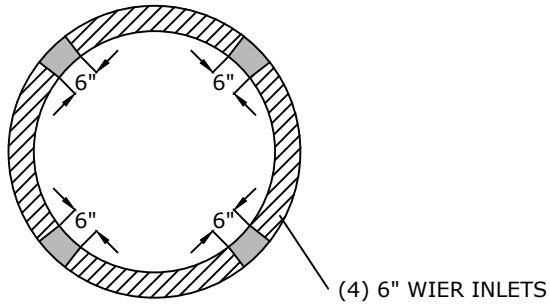


Top View

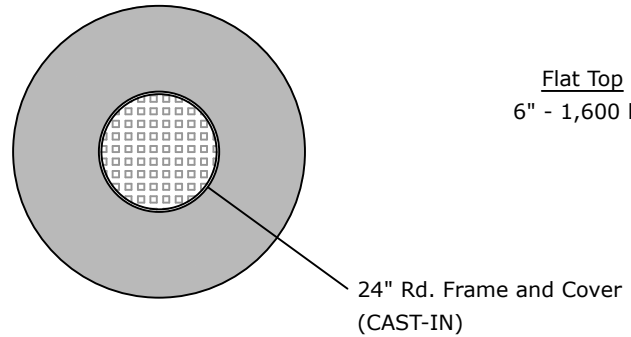


Flat Top



Flat Top
6" - 1,600 lb.

Side View

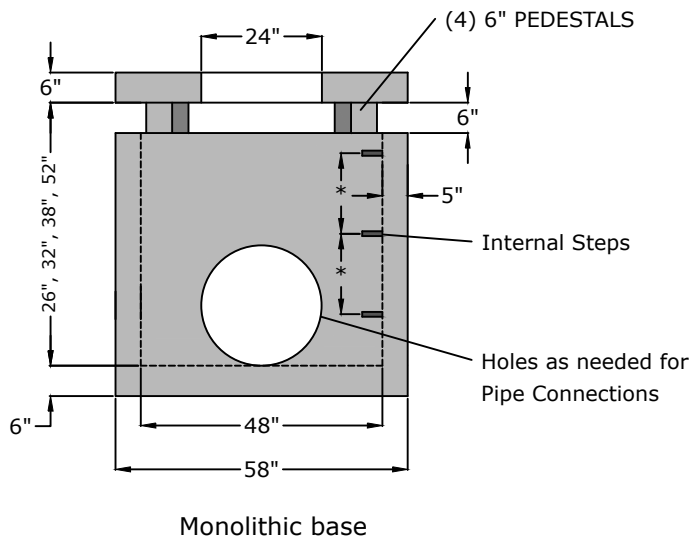

Base Weights
24" - 3,100 lb.
32" - 3,650 lb.
38" - 4,100 lb.
52" - 5,100 lb.

Approved for Production

Project: _____

Date: _____

Quantity: _____

By: _____

Specifications

Concrete: 4,500 psi minimum 28 day compressive strength
Reinforcing: Per ASTM C478 with design calculations performed by a Licensed P.E. Minimum 2" cover of all reinforcing steel.
Pipe Penetrations: All pipe penetrations are placed according to job requirements.
Pipe Sealant: Pipes to be sealed into structure with grout.
Sealant: Sealant used will meet ASTM C923.
Steps: On 16" centers unless otherwise specified.



C.R. Barger & Sons, Inc.
 P.O. Box 370 - Kingston TN 37763
 Phone 888.882.5860 - BargerAndSons.com

**48" i.d. Diameter Drop Inlet
 ASTM C-478 Compliant**

Date: 10/30/15

Drawn By: RFB