




Top View

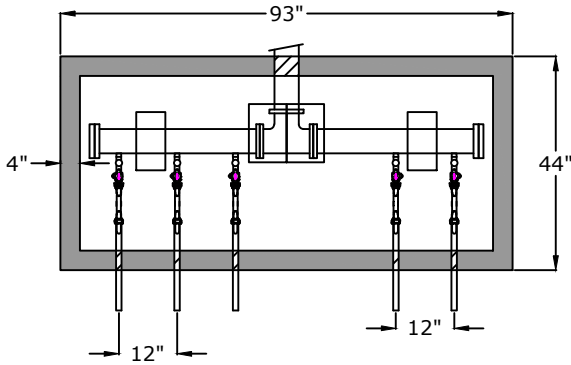

Side View

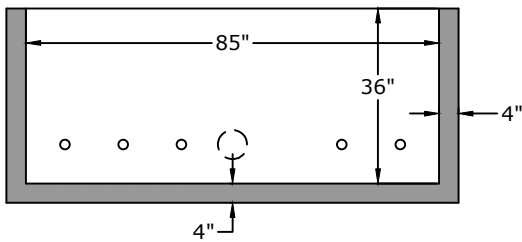


End View



1. (1) 3" Flg x PE 3'-0" spool piece
2. (5) Flange kits
3. (1) 3" Flange tee
4. (1) 3" Flg x Flg 2'-10" with three  $\frac{3}{4}$ " CC taps
5. (1) 3" Flg x Flg 2'-10" with two  $\frac{3}{4}$ " CC taps
6. (2) 3" Blind flange
7. (5) 3" x  $\frac{3}{4}$ " NPT  $\frac{3}{4}$ "<sub>13</sub> saddle OD range 3.45 - 4.05
8. (5)  $\frac{3}{4}$ " x 4" brass nipple
9. (5) AYM34583476101MW  $\frac{3}{4}$ " x  $\frac{5}{8}$ " x  $\frac{3}{4}$ " ball valve FIP x MSN
10. (5)  $\frac{3}{4}$ " meter idler
11. (5)  $\frac{5}{8}$ " x  $\frac{3}{4}$ " meter + MXu provided by Metro
12. (5) AYM34583476110MWQ  $\frac{3}{4}$ " x  $\frac{5}{8}$ " x  $\frac{3}{4}$ " ball valve QJC x MSN
13. (1) Halliday S1K3584CBD 35" x 84" S1K F+C 316SS

Pipe detail for taps



**Approved for Production**

Project: \_\_\_\_\_

Date: \_\_\_\_\_

Quantity: \_\_\_\_\_

By: \_\_\_\_\_



**Specifications**

- Concrete:** 5,000 psi minimum strength (28 day)
- Pipe Penetrations:** All pipe penetrations are placed according to job requirements.
- Pipe Stands:** Adjustable height pipe stands can be provided to support assembly.
- Sealant:** Sealant used will meet or exceed ASTM C990.

**5 Gang Meter Vault - Nashville Metro  
36" W x 85" L x 36" T**

C.R. Barger & Sons, Inc.  
P.O. Box 370 - Kingston TN 37763  
Phone 888.882.5860 - BargerAndSons.com

Date: 11.212017

Drawn By: Eric Barger

Approx. Vault Weight: 4,600 lbs.