



Top View

End View

- **4" inlet/outlet (standard)**
- 2/3 - 1/3 compartment capacity

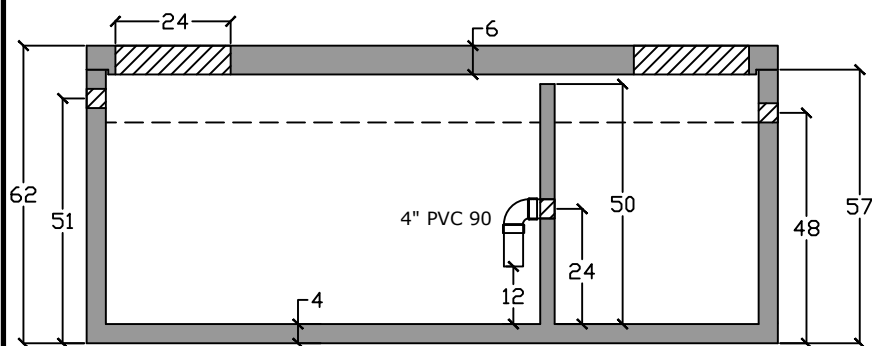

Side View

Baffle View

Specifications

Concrete: 5,000 psi minimum strength (28 day)

Reinforcing: Primary reinforcement will be rebar.

Risers: Grade rings and manhole frames and covers sold separately.

Sealant: Sealant used in the seam of the tank will meet or exceed ASTM C990.

Pipe Penetrations: Inlet and outlets are fitted with seals that meet or exceed all ASTM C923 specifications.

Partition Wall: The partition wall, if present, is poured monolithically.

Drawing: All measurements are accurate within ± 1 inch.

Tank Warranty: See Terms and Conditions.

BARGER PRECAST

C.R. Barger & Sons, Inc.

P.O. Box 370 - Kingston TN 37763

Phone 888.882.5860 - BargerAndSons.com

Weights

Weights
Top - 5,200 lb

Bottom - 12,500 lb

Anti-Float Protection

19" of water

Installation: The tank hole is not to be more than 18 in. longer and wider than the tank. There shall be a minimum of 6" of 3/4" stone bedding. Do not install across path of vehicles or heavy equipment. This tank is designed for one hundred fifty pounds per square foot (150 lb/ft2) uniform loading on the top of the tank with a max backfill cover of 36" and a minimum of 6".

Grease Trap 1500 Gallon

Date: 3.26.2021

Drawn By: Eric Barger

Date:	2.15.2024
-------	-----------